


DD115H

Emitter Specification

VersionNO.:A/01

Technical
support

Type specification

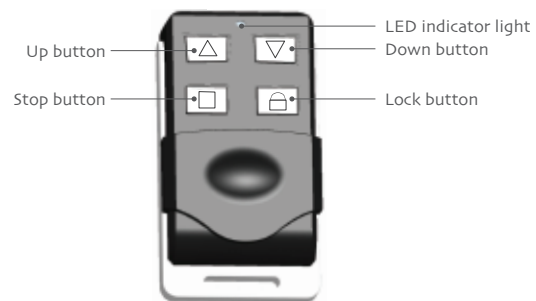

DD115H
Single-channel emitter

Technical
support

Technical support

Technical specification	Function instruction
<ul style="list-style-type: none"> • Input voltage: 3V (CR2032) • Transmitting frequency: 433.05~434.79MHz • Transmitting power: 10 Milliwatt • Operating temperature: -5°C ~ 50°C • Transmitting distance: outside: 150 meters, inside (between two walls): 40 meters 	<p>DD115H is a single-channel emitter, after the success of the button will have a LED indicator light flashes prompt, keep holding a button for more than 20 seconds, enter the non emission state.</p> <p>Lock button is valid only in the collocation of DD136H.</p> <p><small>Notice: Emitter couldn't be exposed to moisture and striked, so as not to affect life. When you use emitter, if found emission distance obviously short or less sensitive, please change another same new battery. Please have batteries for recycling.</small></p> <p><small>Caution: Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.</small></p>